



The most economical among the hose winders with large, visible reel discs of stainless steel for fire pressure hoses of sizes 110, 75, 45 and 25mm and a length of up to 35 m in premium processing and sophisticated functionality of the PREY winder-family for every application.

The mobile Electric-Fire-Hose-Winder of PREY – short ESW – is the most solid of its kind. It is in addition to the stable reel discs equipped with a powerful geared motor, a switching station with foot control and dead-man control and a large and stable base, which serves a secure stability even during winding of heavy hoses.

The ESW has an overload cut-off and a winding-relaxation-fork for easy removal of the wound hose, a cable holder and a insertion holder for the removable reel wheel.




The placement of the two fixed and swivel casters with brakes under the base plate prevents a rear hook and catching on objects and people. They are made of stainless steel bearing blocks with low-friction bearings and particularly quiet, floor-protecting rubber covers for increased driving comfort of the ASW. The base plate itself is provided with rounded corners and revolving semicircle steels to prevent the lower hook of couplings and to protect masonry reveals and door frames.

The main components of the ESW are identical to those of our proven system technology and hold to the highest loads. The ESW is mobile, can therefore be used anywhere and if required in terms of any individual site requirements can be combined with any single or combi unit without a permanently installed winder.

Technical specifications:

Order number:	1-004-040611
Indication:	Electric-Hose-Winder
Type:	ESW
Measurement:	620 x 620 x 1225mm (WxLxH)
Weight:	85 kg
Connected load:	230V AC / 50Hz / 0,25kW / 16A
Capacity	
- hose size:	110mm / 75mm / 45mm / 25mm
- hose length:	up to 35 m (75mm)
- hose material:	all known material

Functions:	winding
Operating Mode:	one man operation
Winder:	electric hose winder
Type of installation:	mobile
Combination with::	all other hose maintenance units
Standard equipment:	hose guiding fork
	cable holder
	steering and fixed heavy duty roller
	fixing break
	winding relaxation

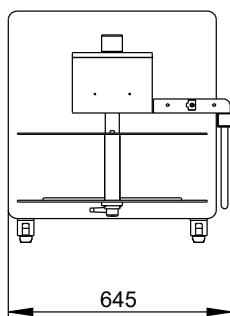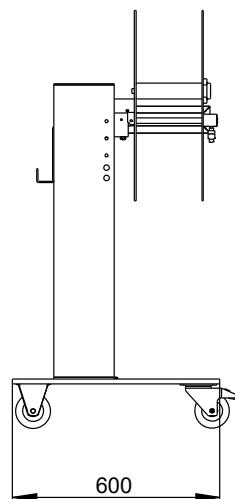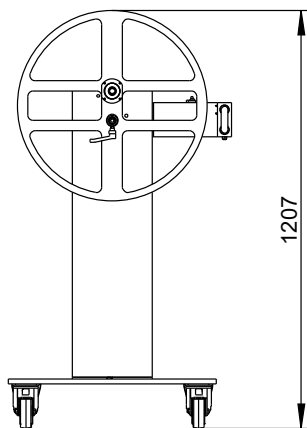

Technische Details

Netzwasseranschluss:	nicht benötigt	Stromanschluss:	AC / 230 V / 16 A / 50 Hz
Gewicht:	85 kg	Leistung der Leitung:	0,25 kW

Elektro-Schlauch-Wickler